

NEJLEPŠÍ JE


KUBÍČEK

RUBY


RABBITMQ

RABBITMQ
V KRAXNETu
(registrator,
daukce.cz, ...)


AMQ Model Recap

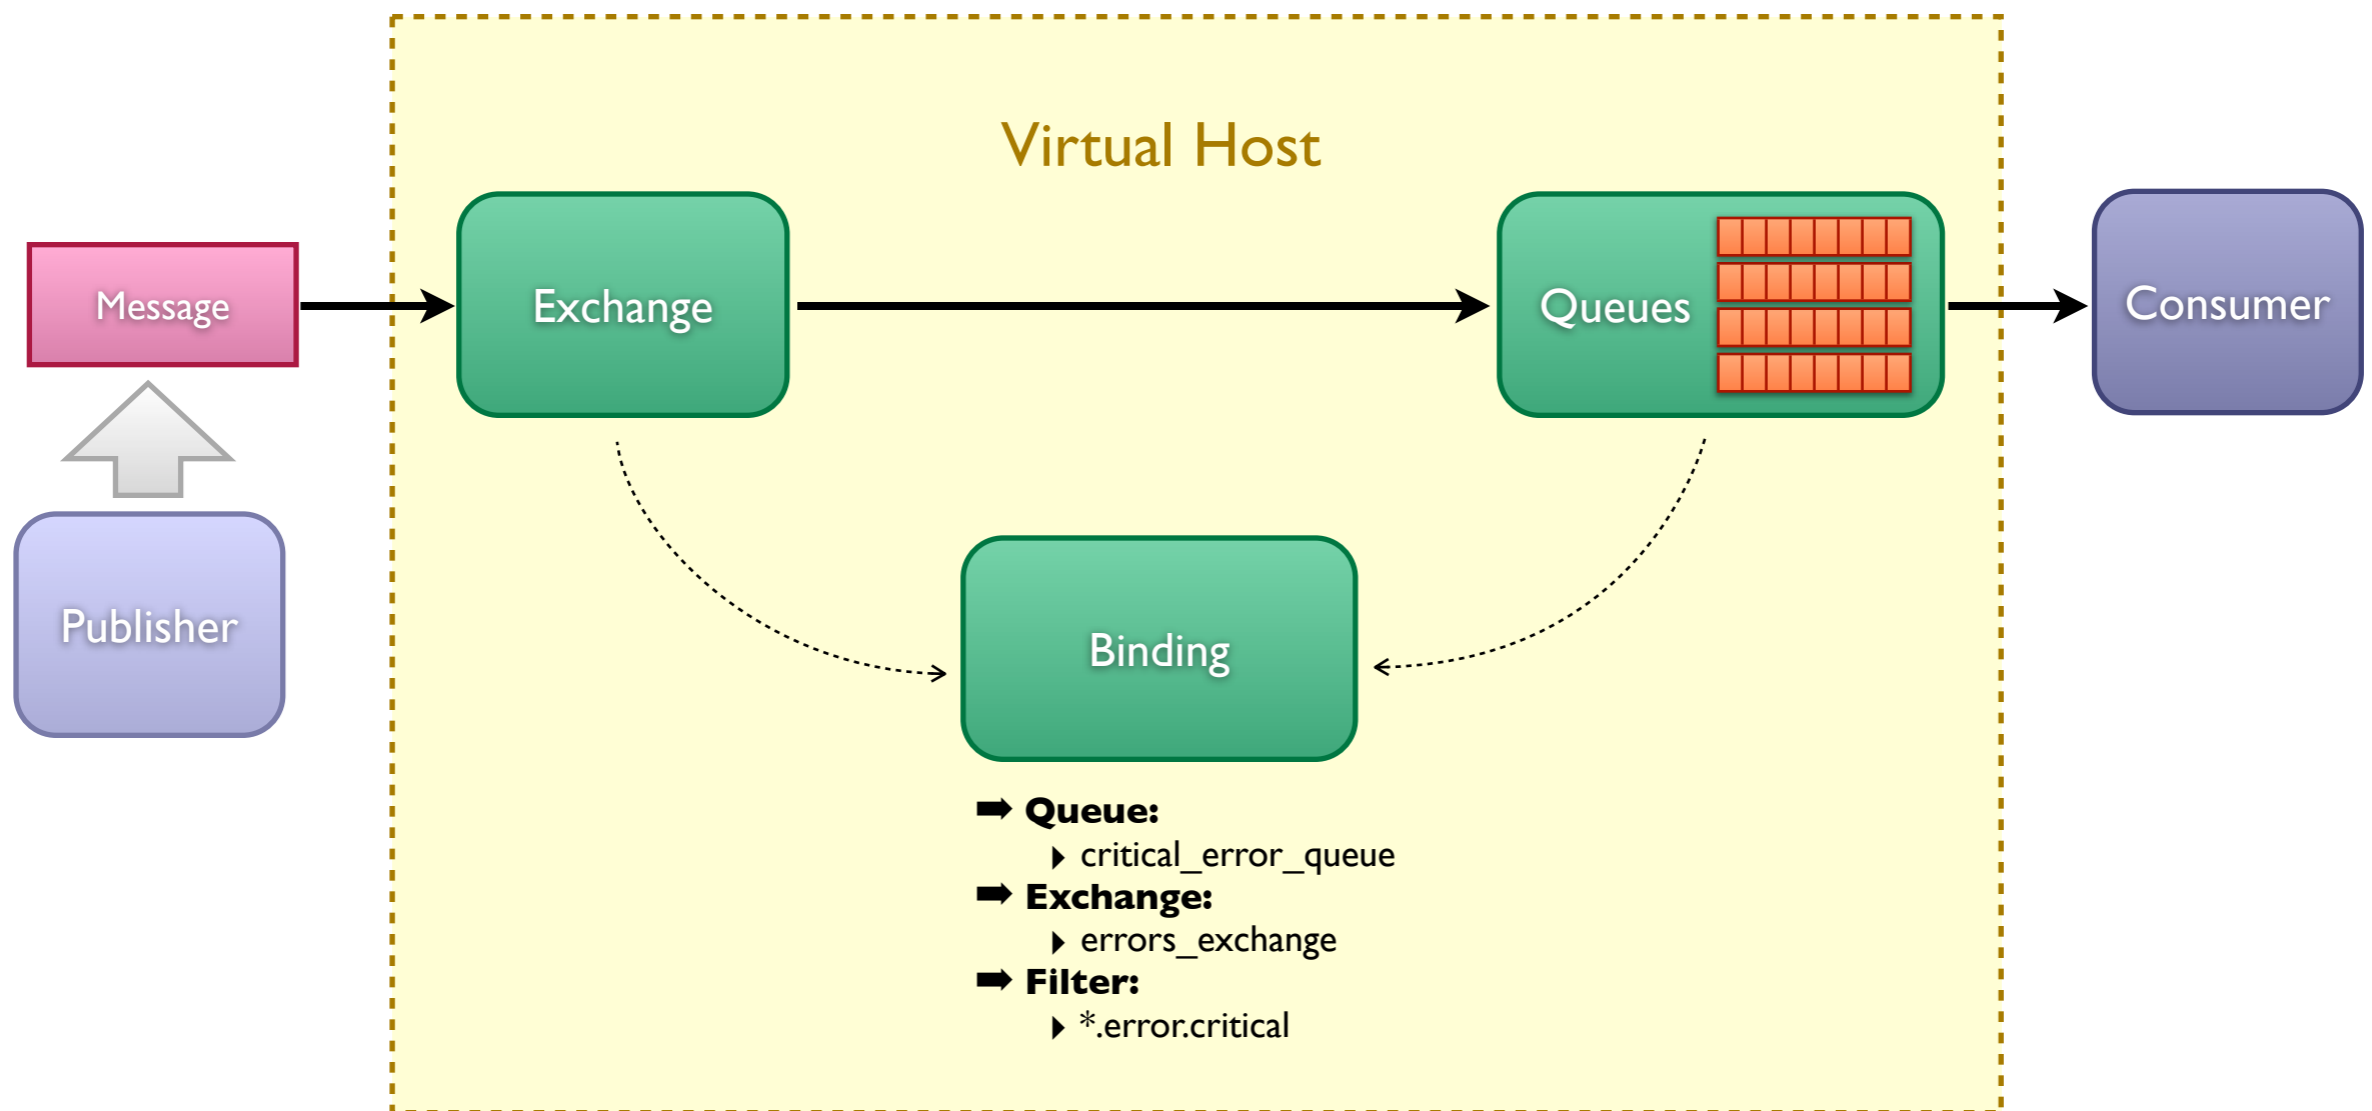


Exchange Types

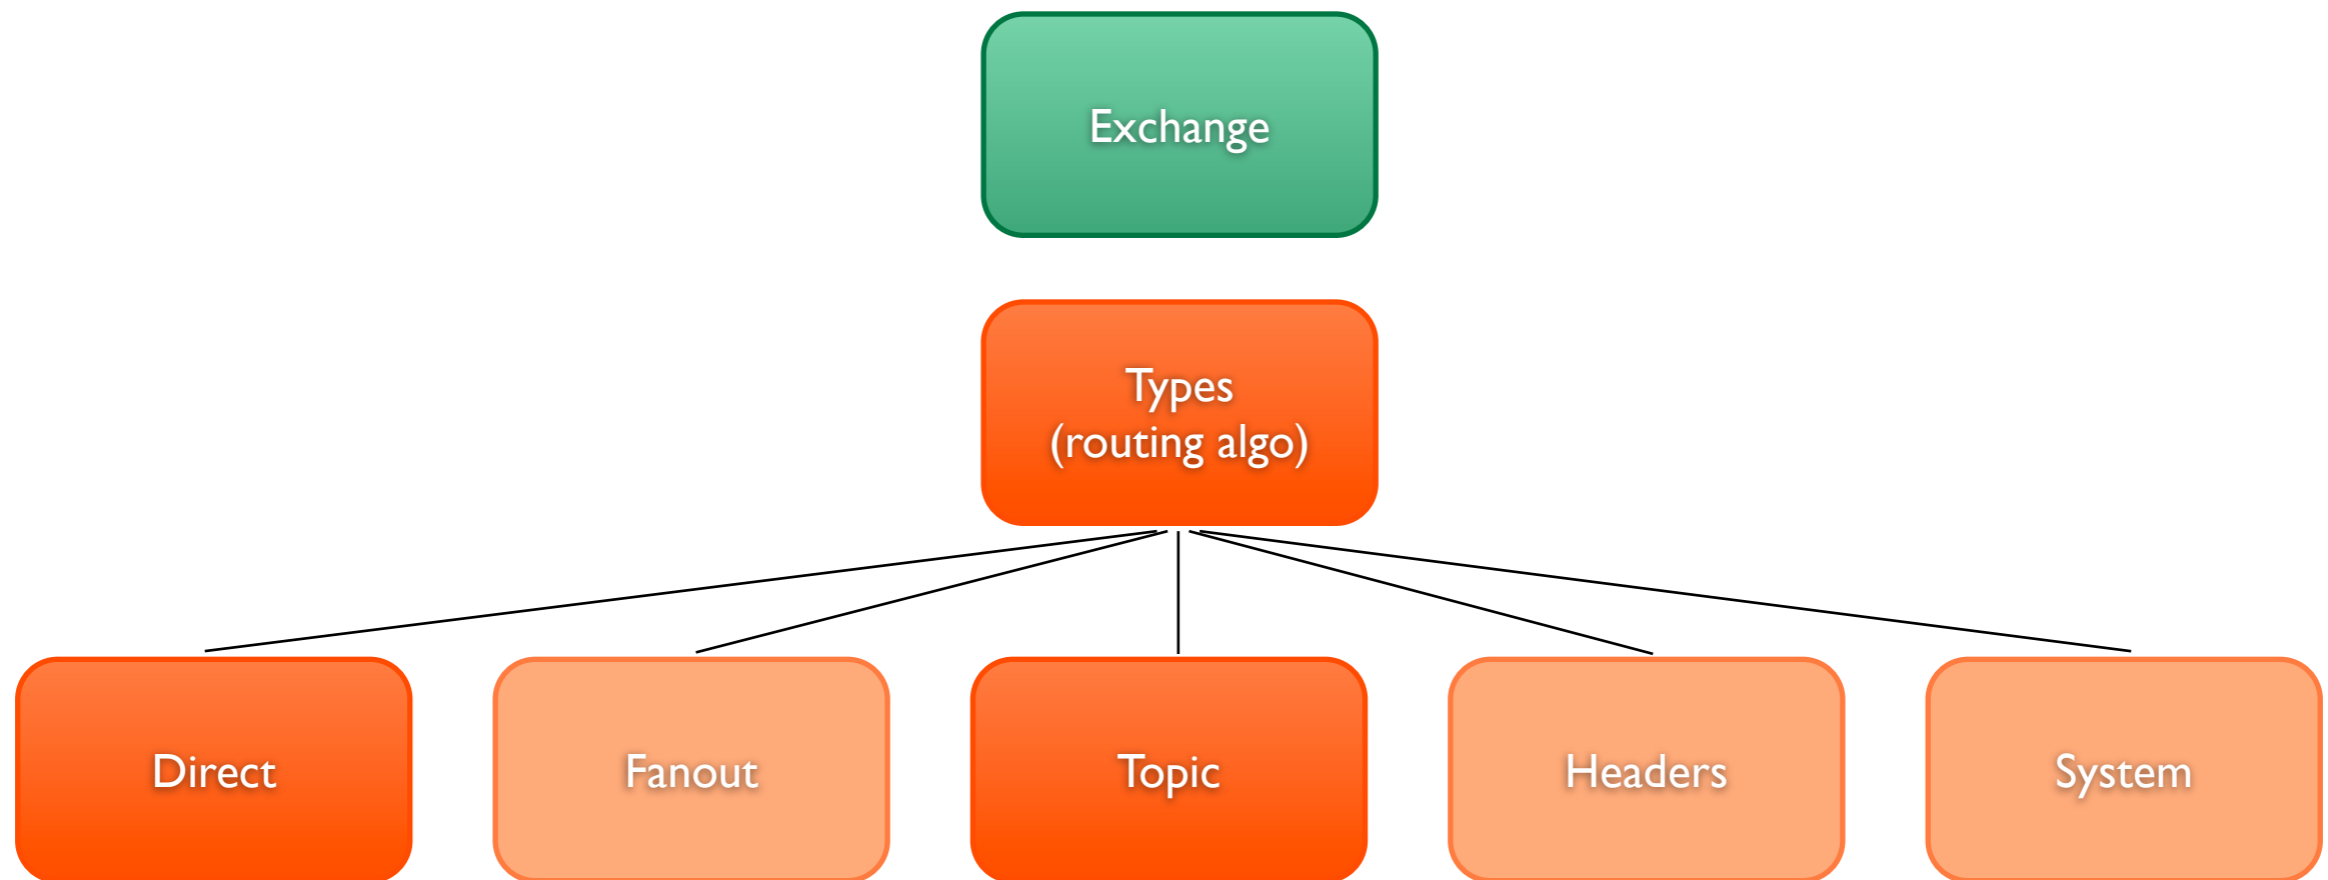


Topic Exchange

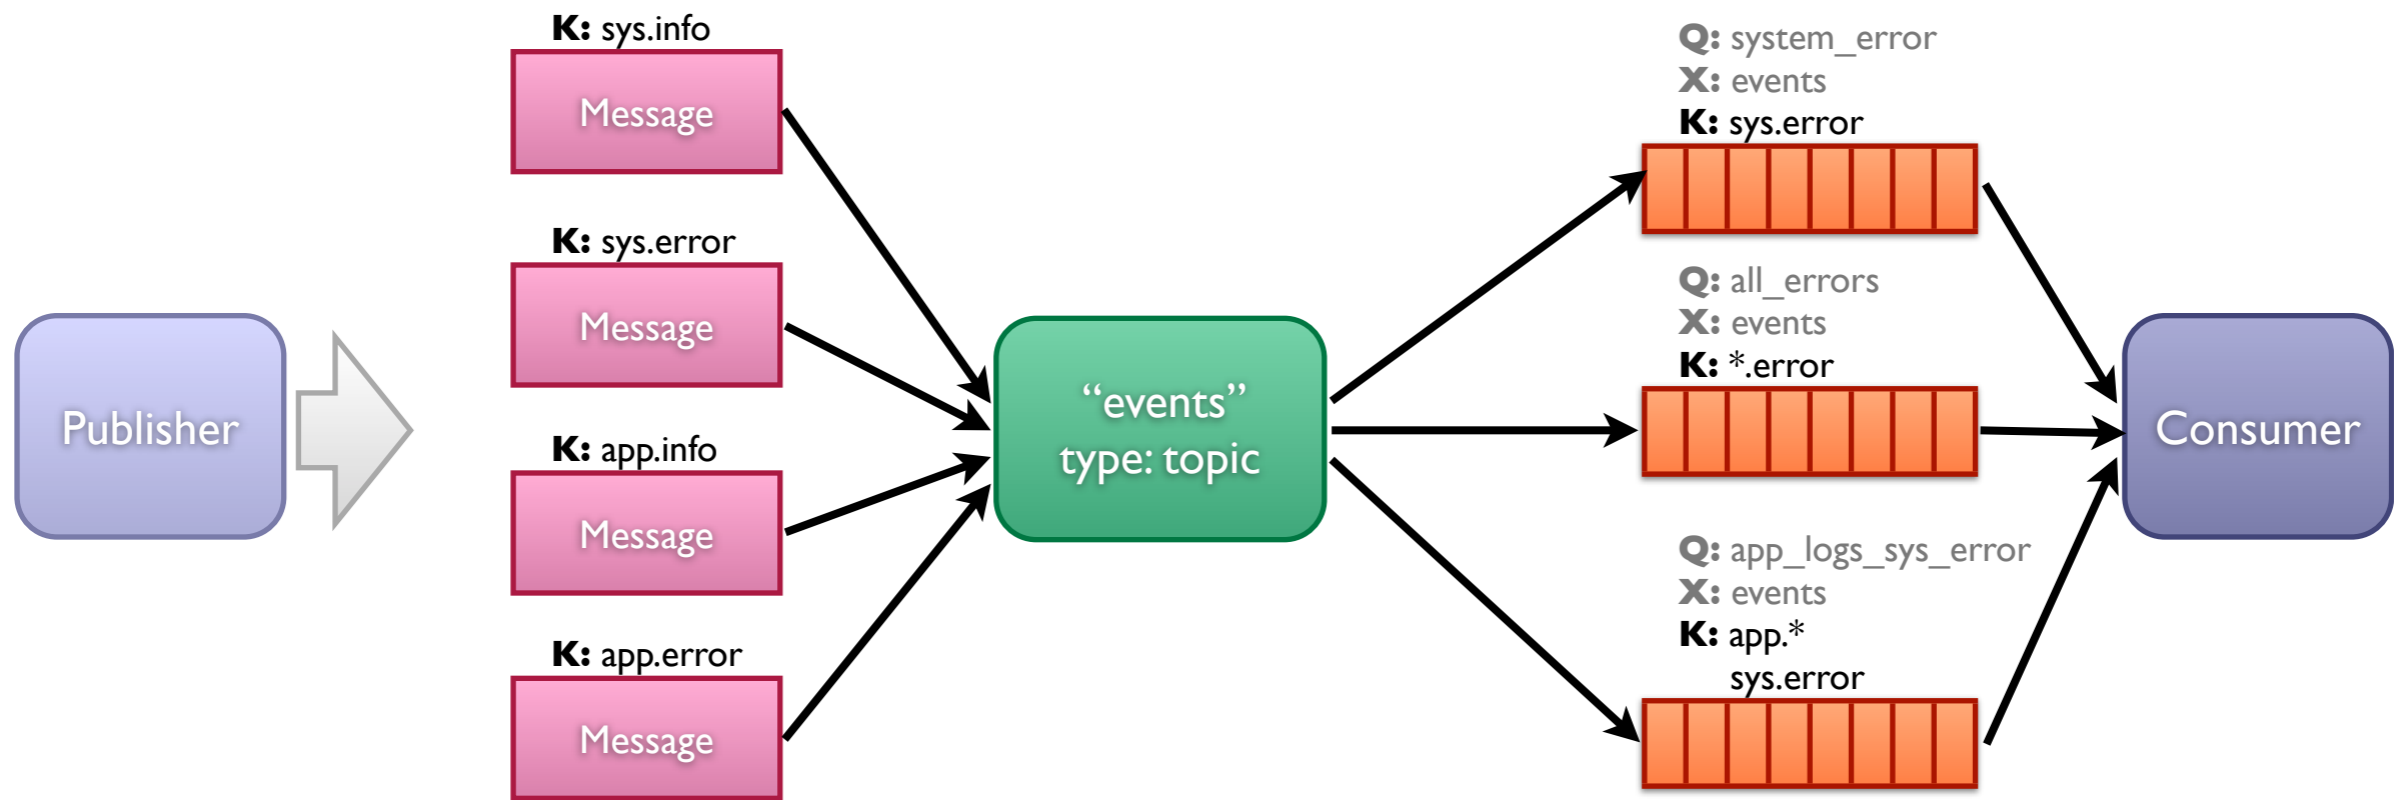


Topic Exchange

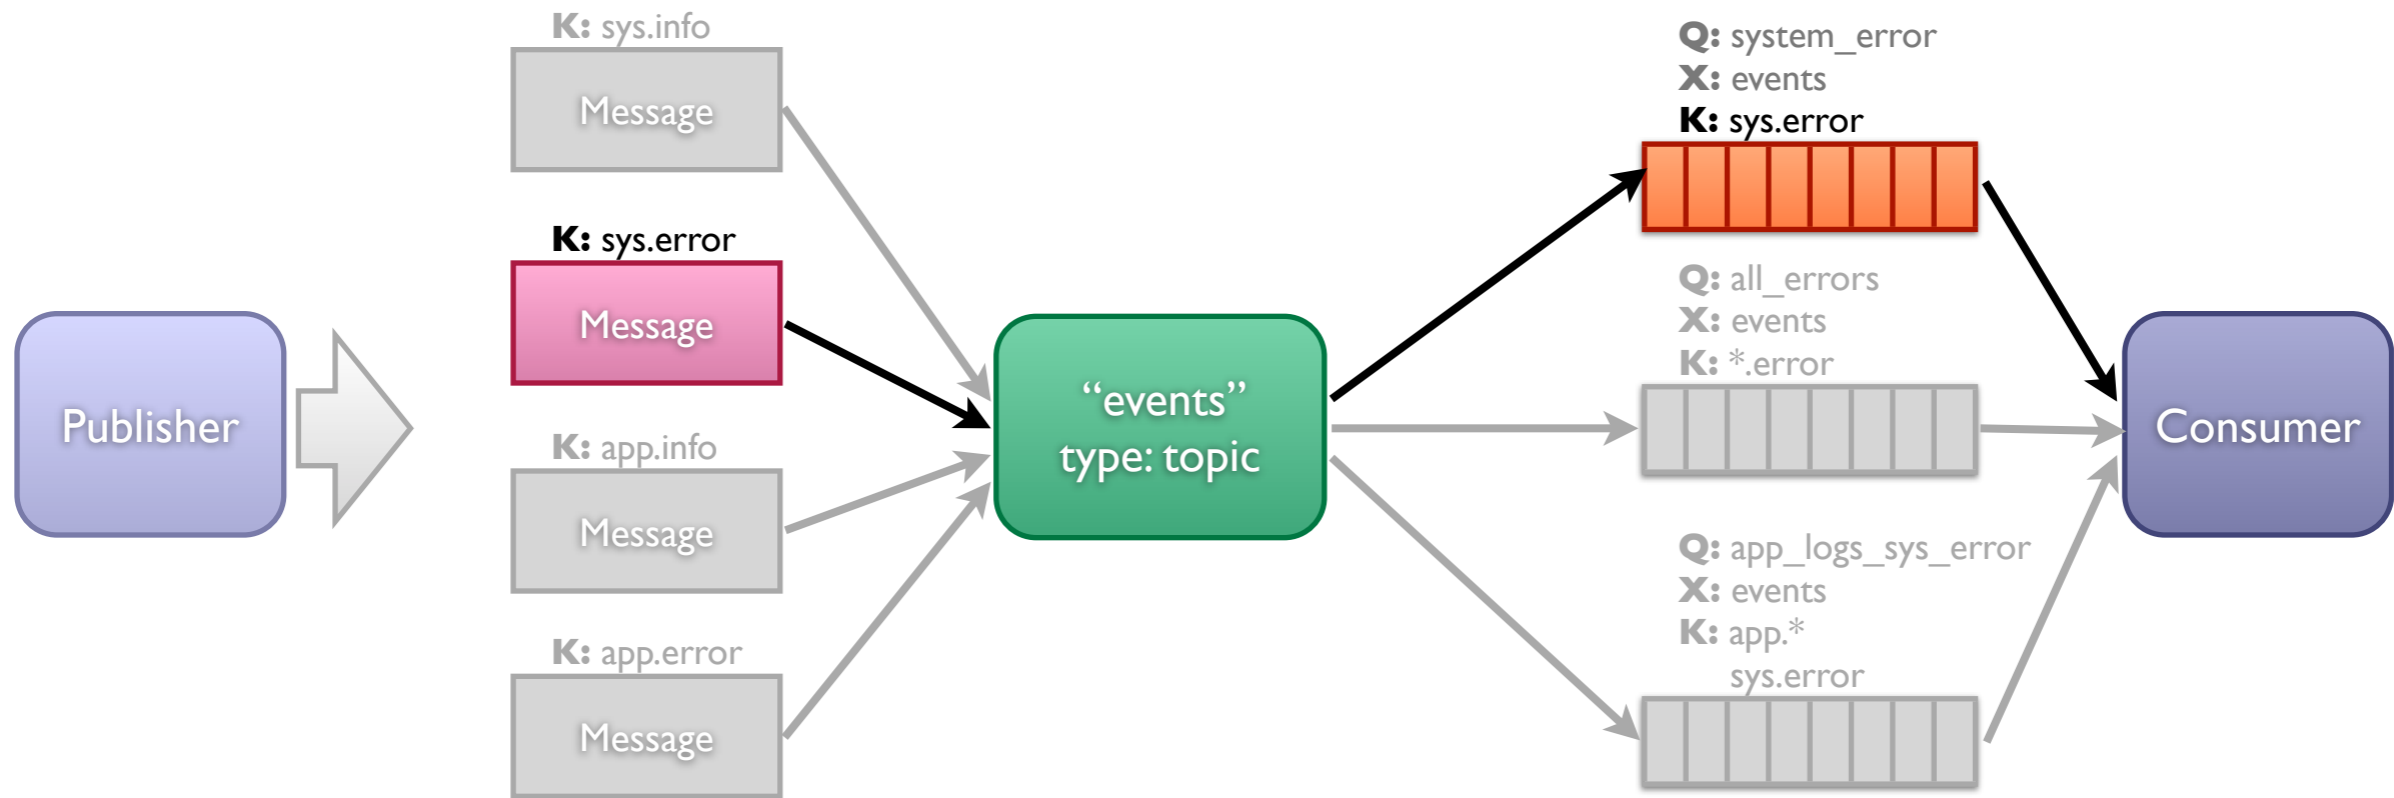


Topic Exchange

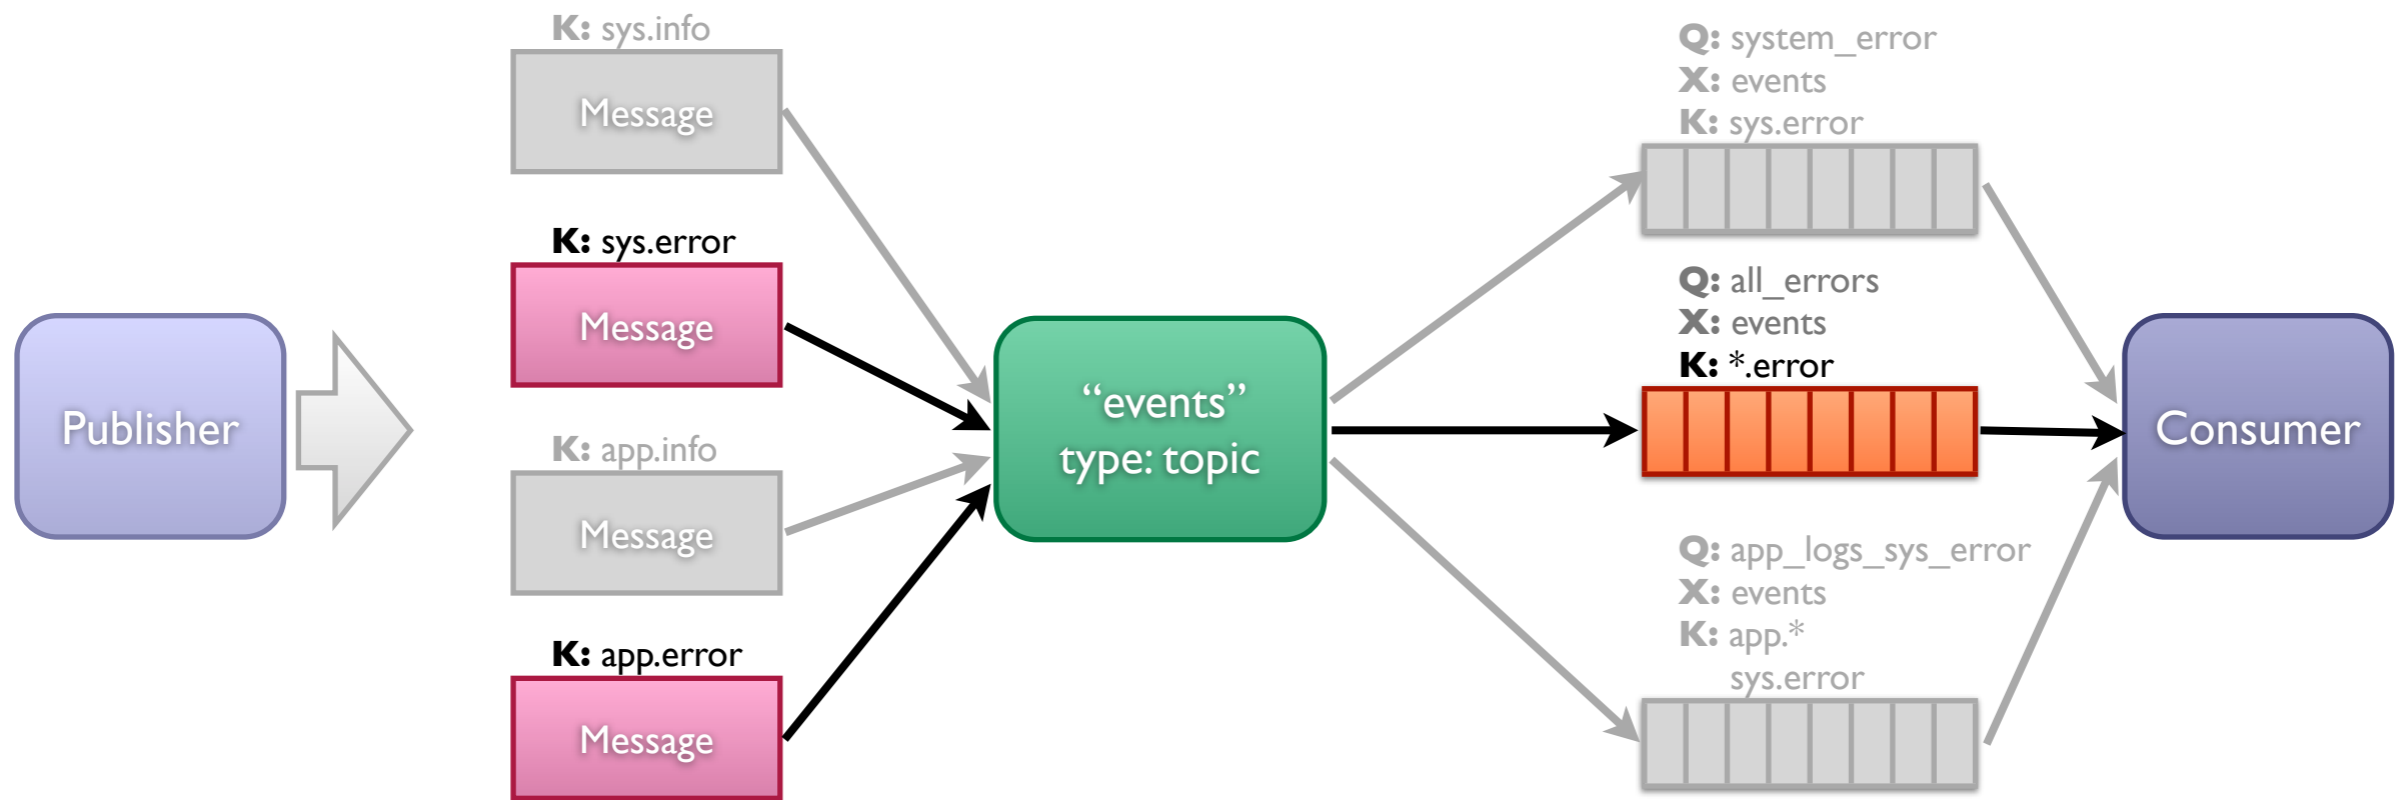


Topic Exchange

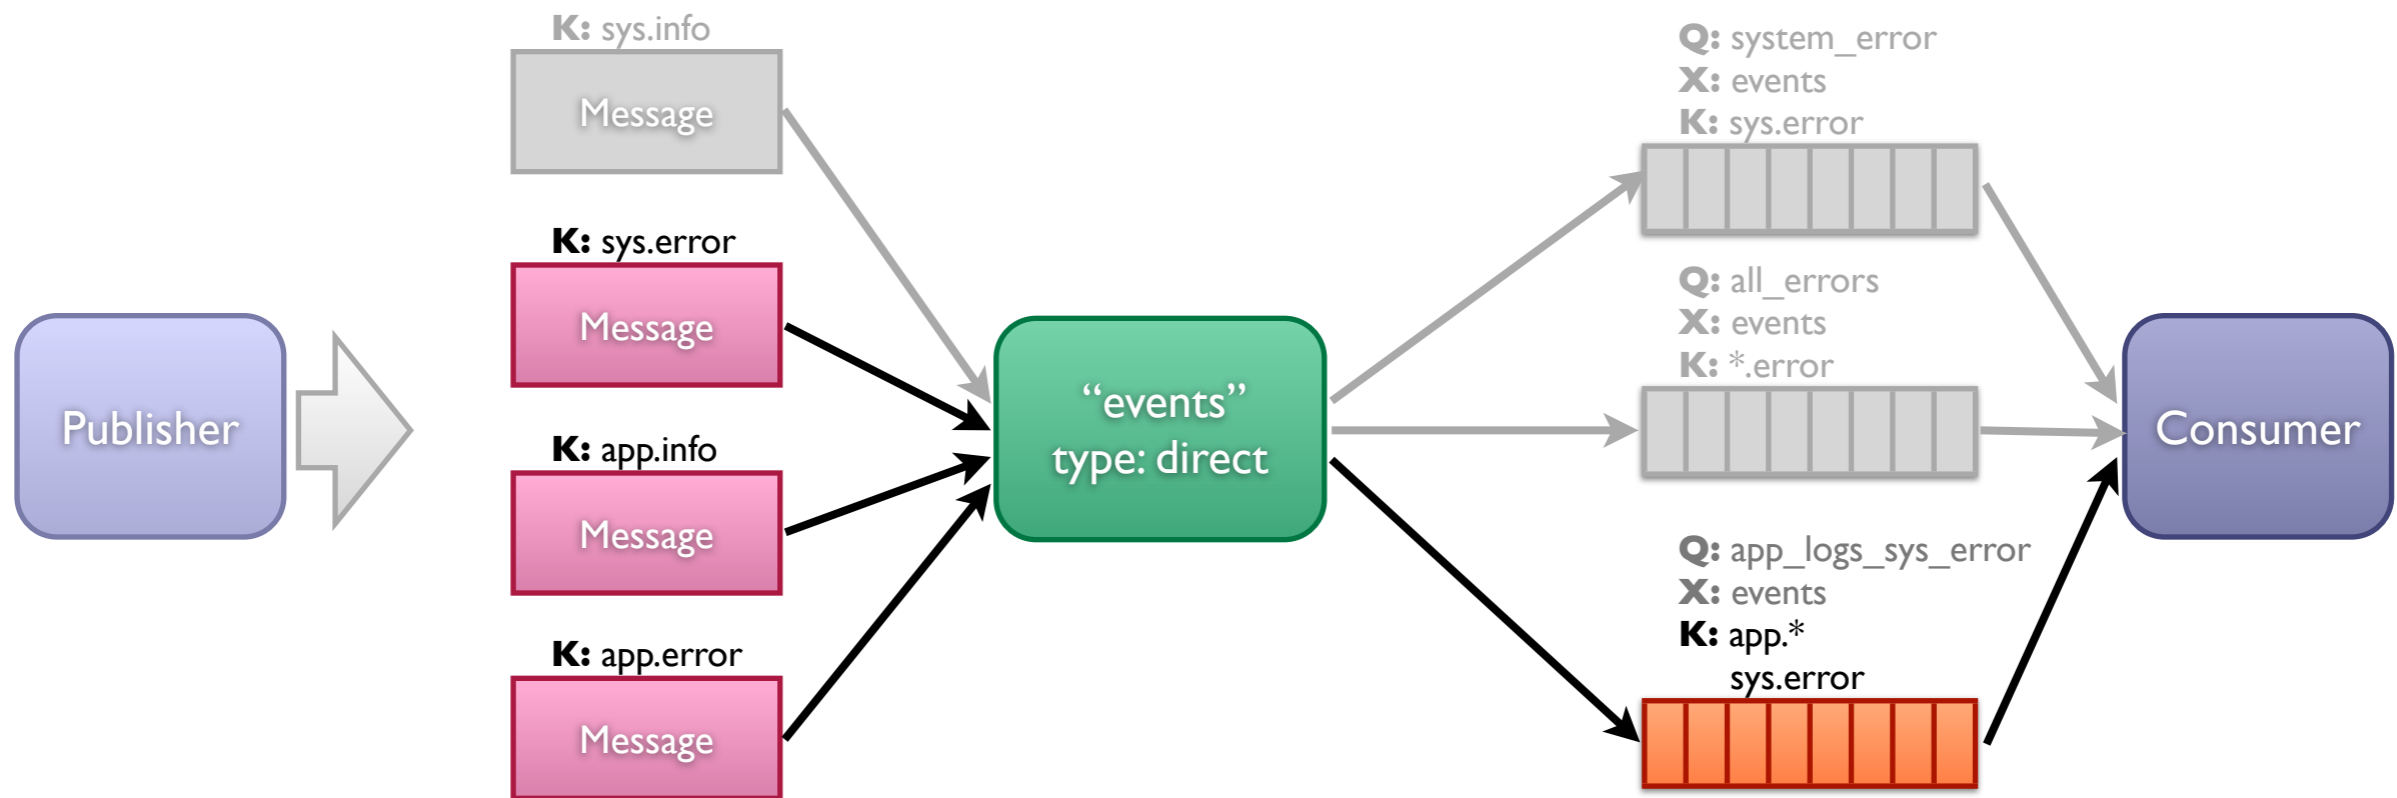

Topic Exchange

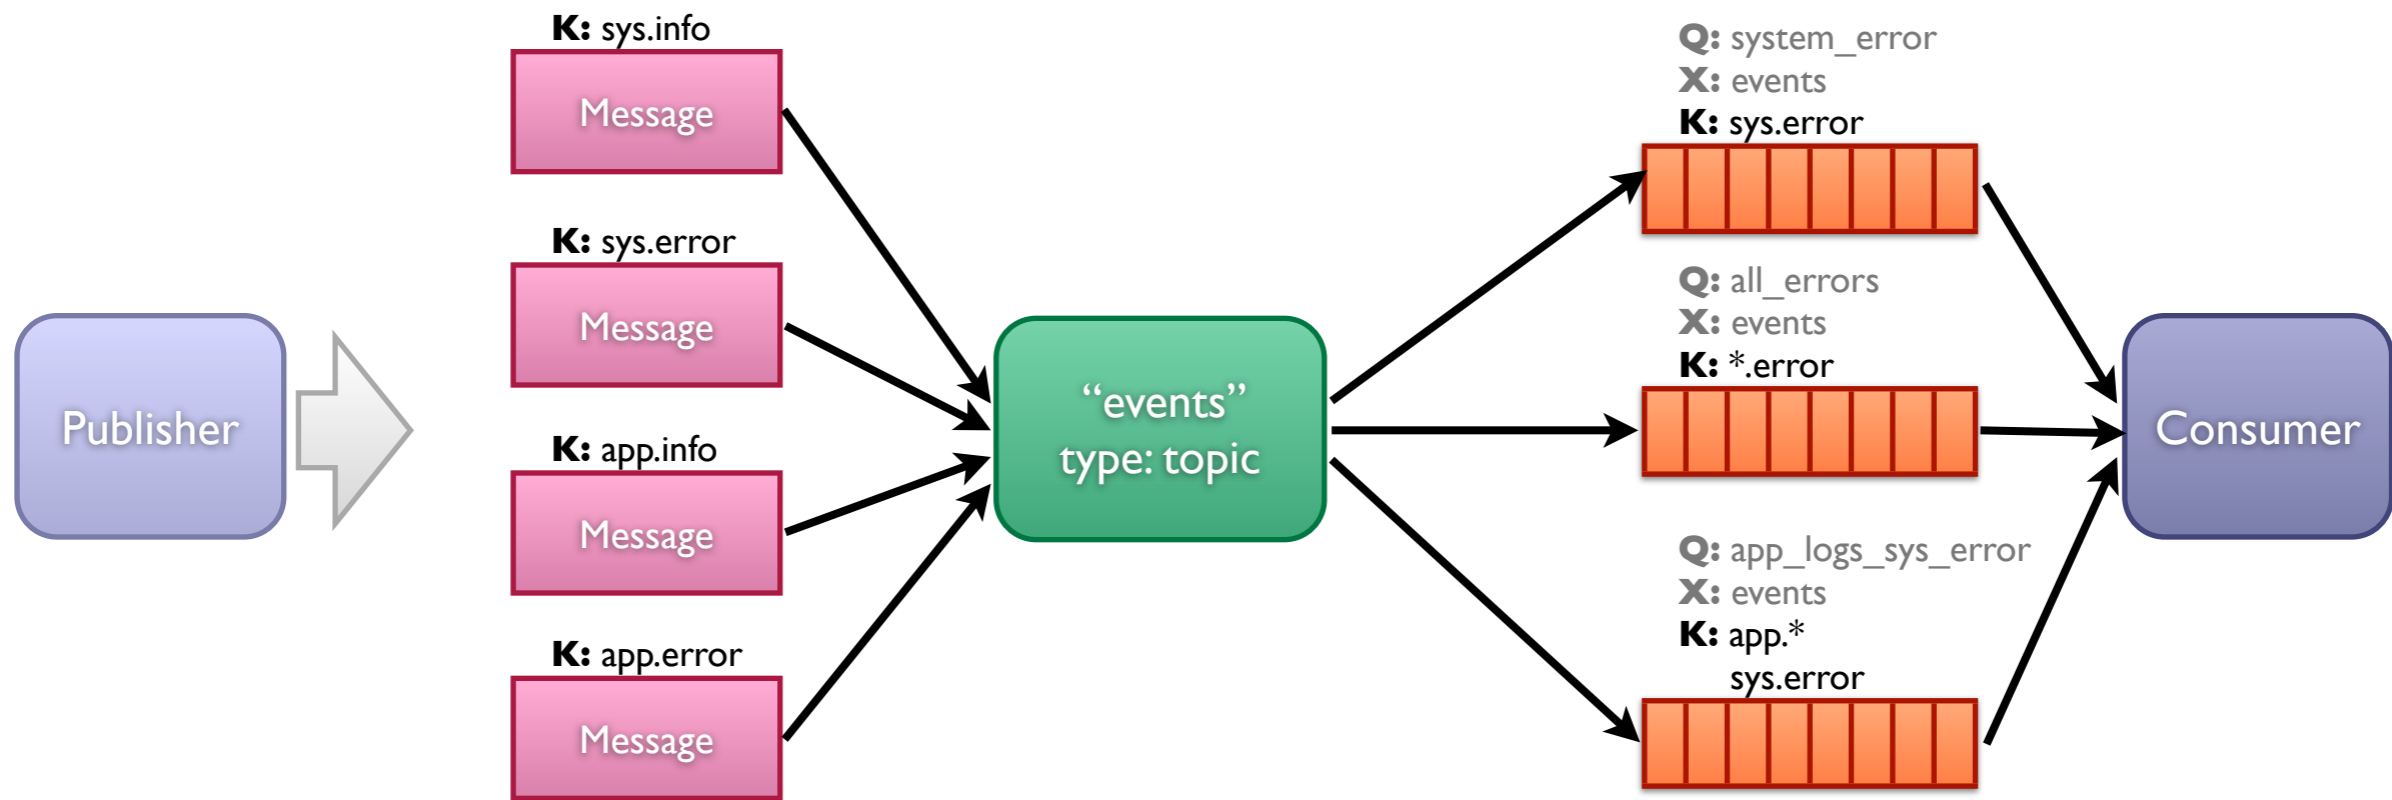


Persistence & Durability

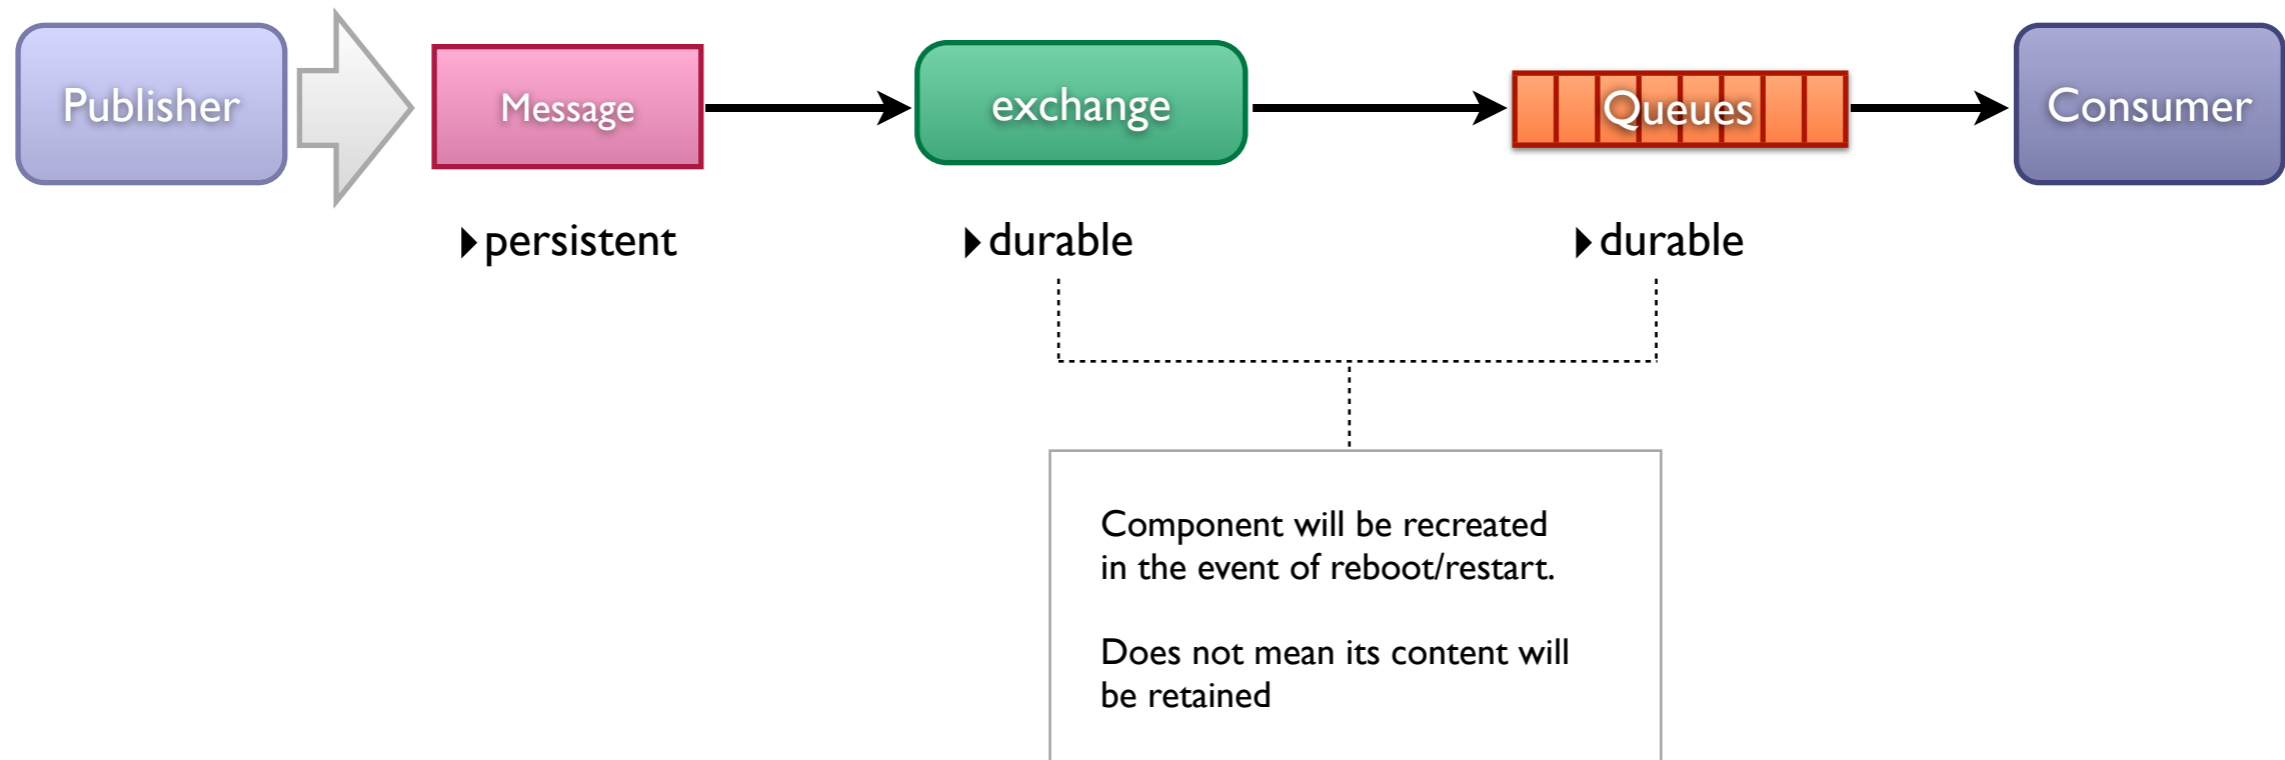

ACK

HEADERS EXCHANGE

RPC

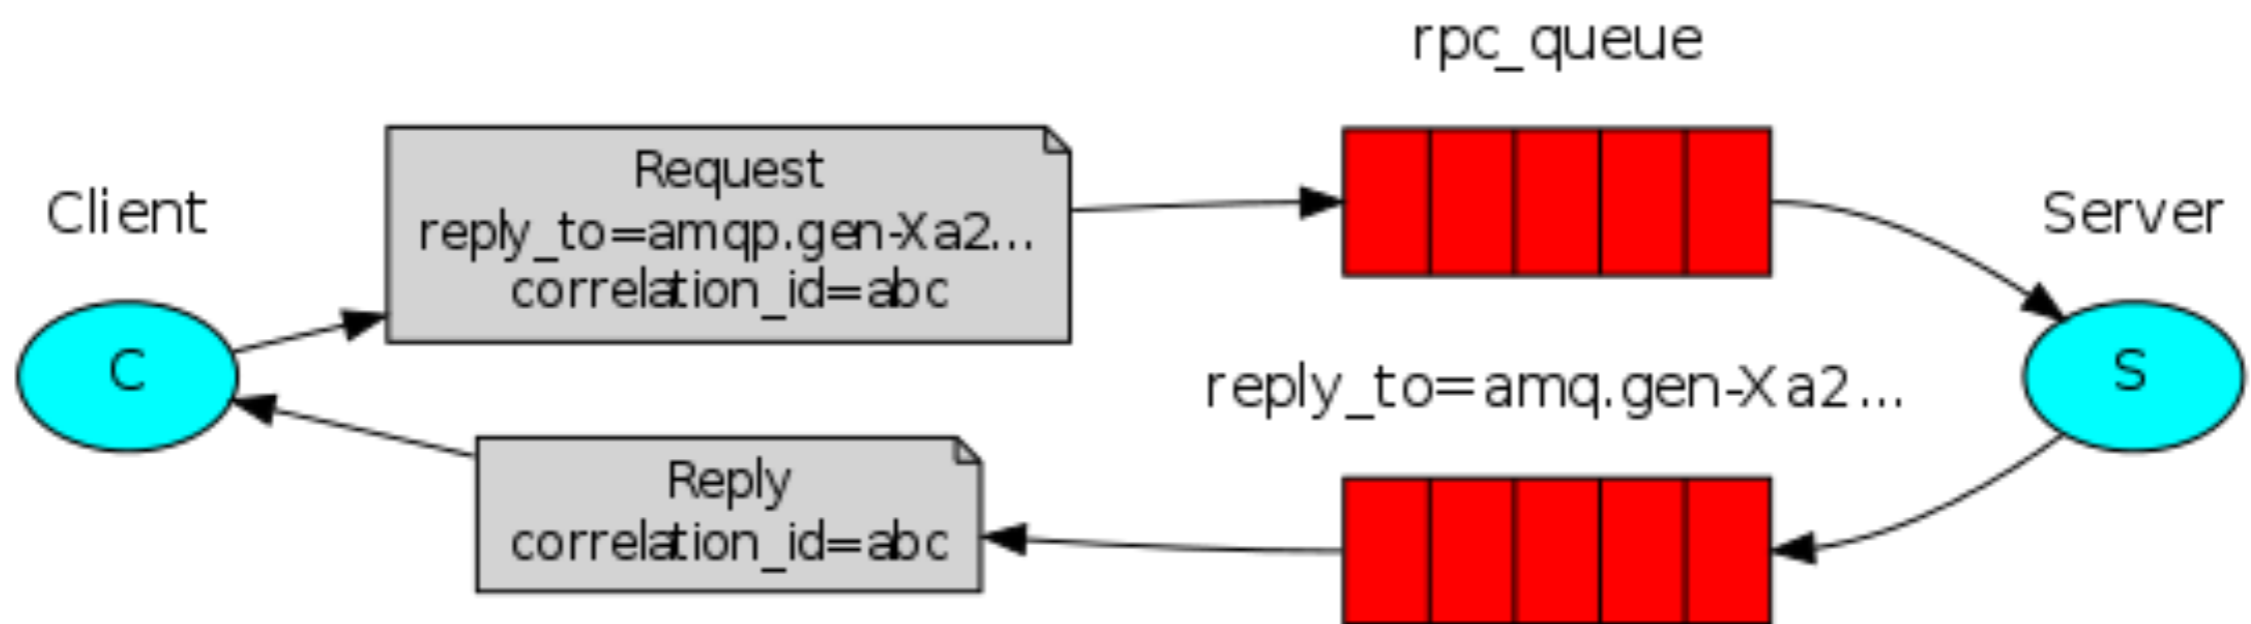

Multi Protocol




<http://bit.ly/rmq-protocols>

[Overview](#)
[Connections](#)
[Channels](#)
[Exchanges](#)
[Queues](#)
[Users](#)
[Virtual Hosts](#)


Overview

▼ Totals

Queued Messages

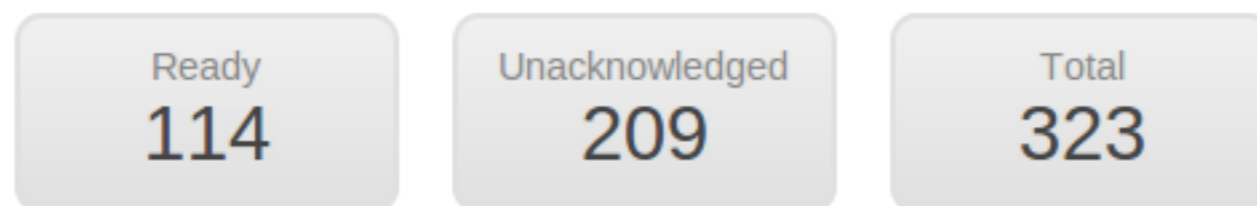

Message Rates

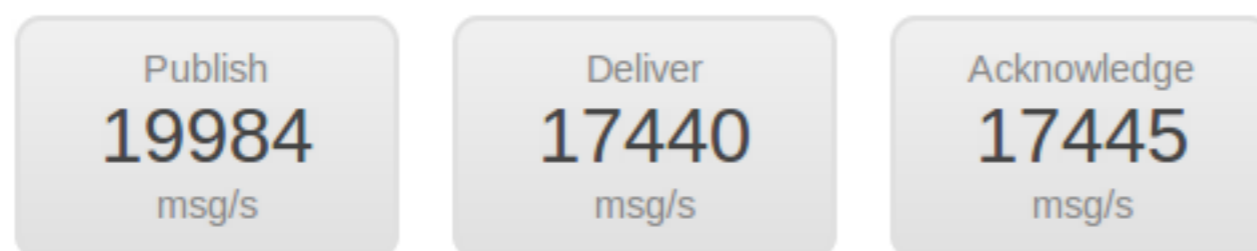

▼ Nodes and Ports


RabbitMQ Nodes

Name	File Descriptors (used / available)	Erlang Processes (used / available)	Memory (used / high watermark)	Uptime	Version (RabbitMQ / Erlang)	Mnesia Storage
rabbit@smacmullen	28 / 1024	206 / 1048576	156.1MB / 4.7GB	0m 19s	2.2.0 / R14B	disc

Listening Ports

Host	Bound to	Port
smacmullen.eng.vmware.com rabbit@smacmullen	0.0.0.0	5672 amqp
smacmullen.eng.vmware.com rabbit@smacmullen	0.0.0.0	5671 amqp/ssl

RabbitMQ Simulator

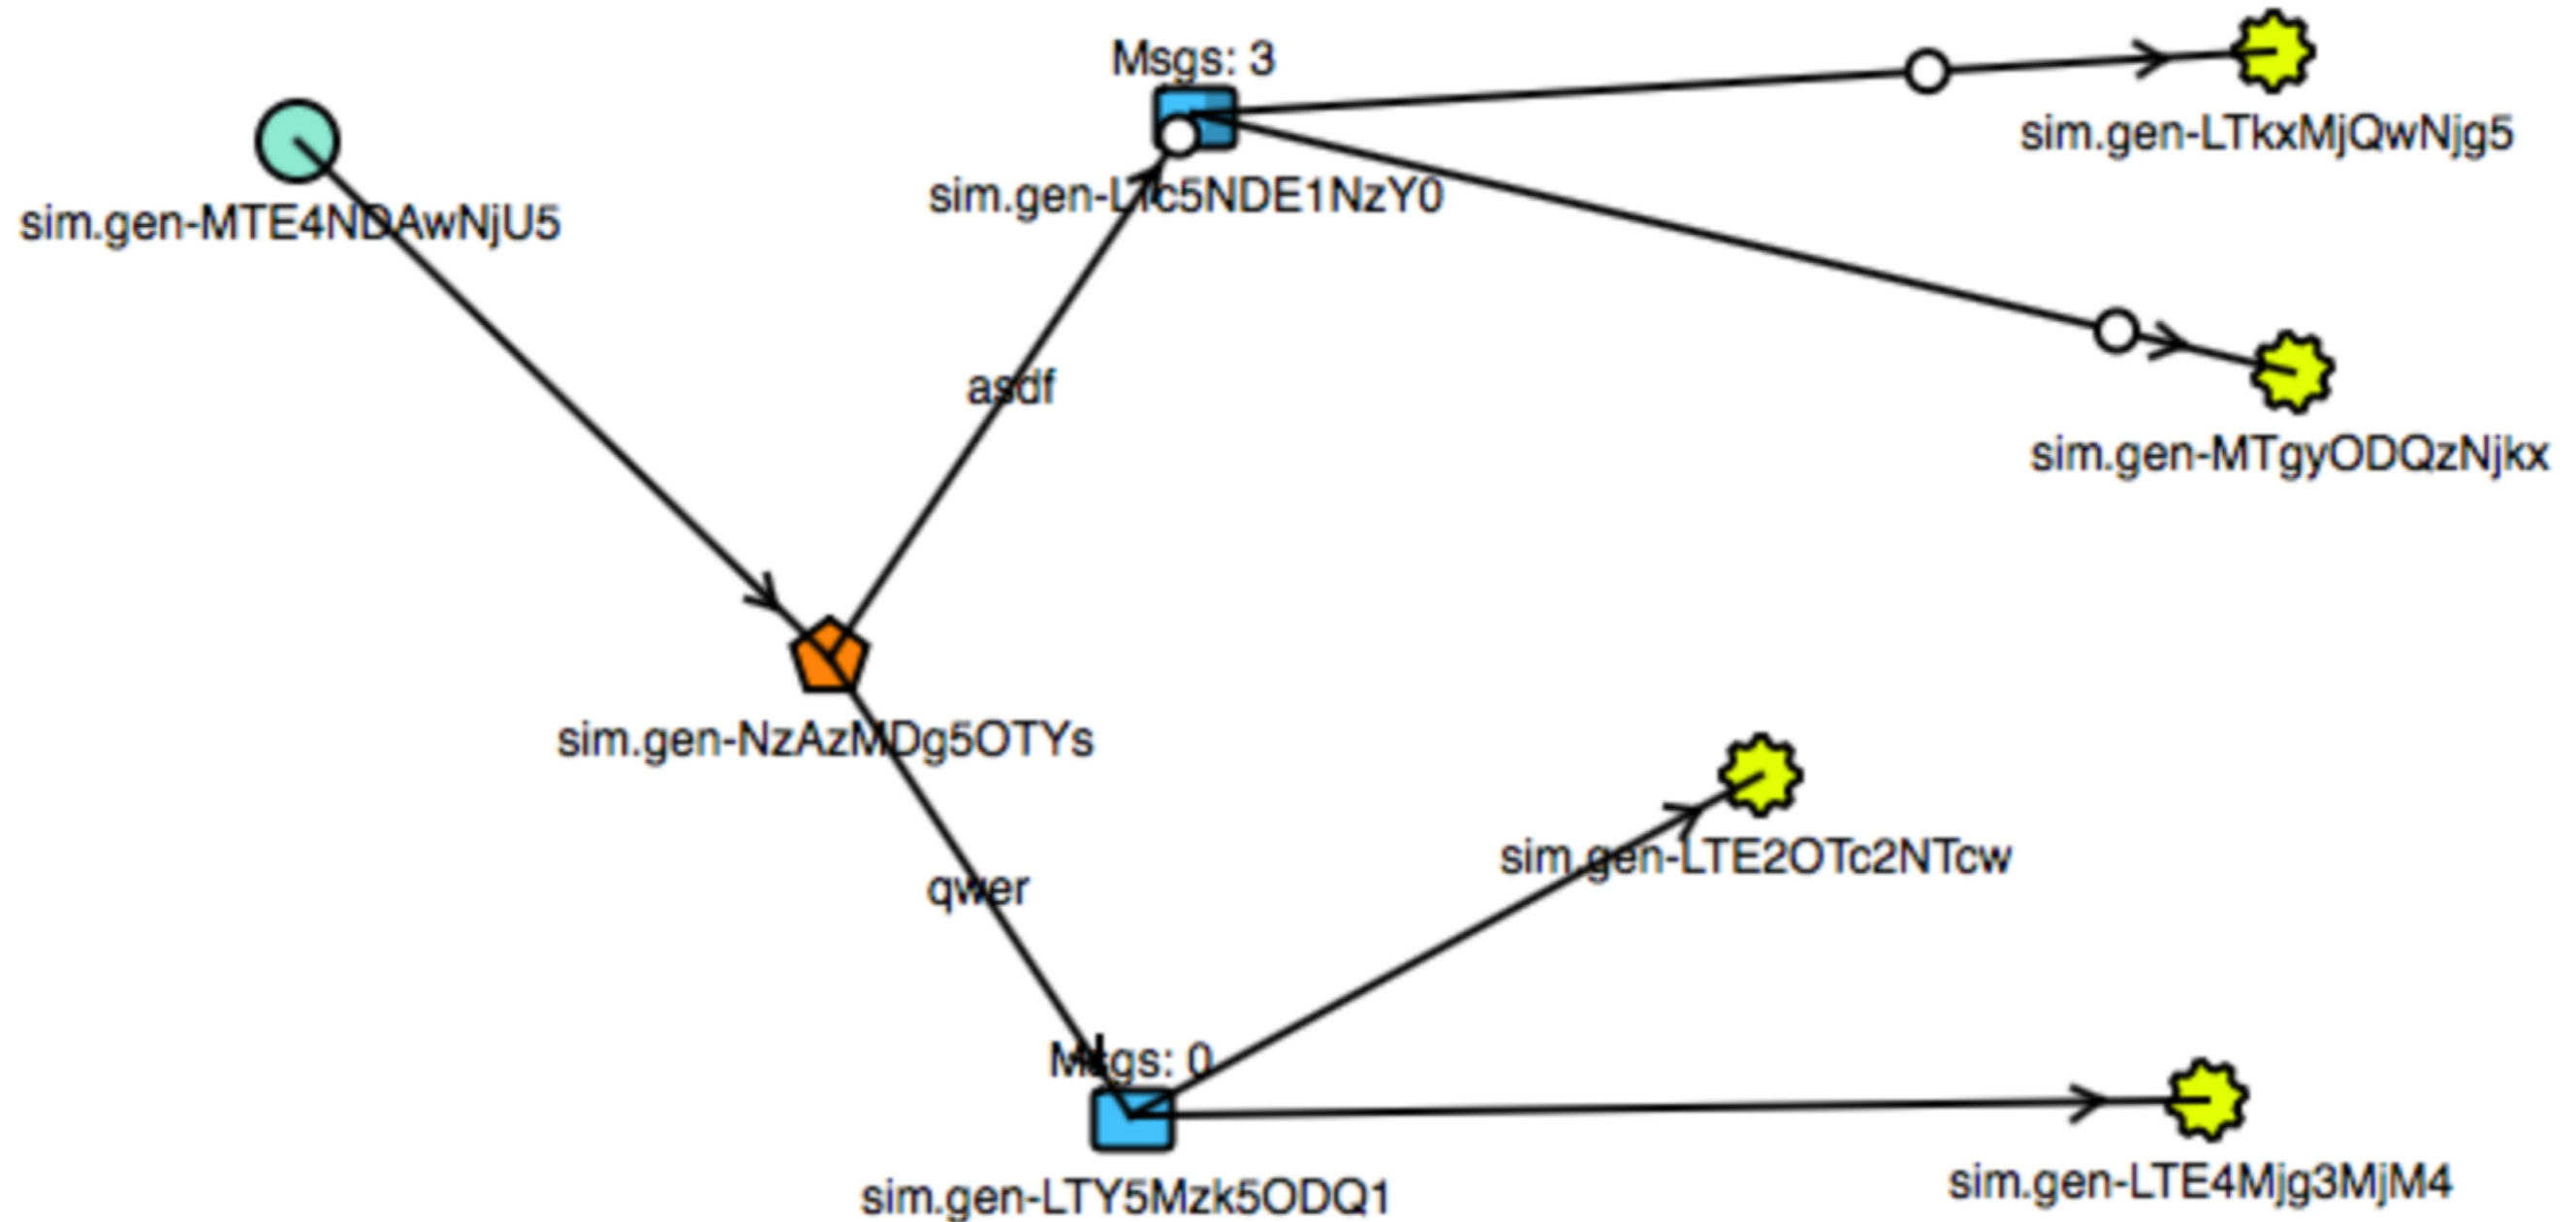

<http://tryrabbitmq.com>

ElasticSearch River

```
{ "index" : { "_index" : "twitter", "_type" : "tweet", "_id" : "1" } }  
{ "tweet" : { "text" : "this is a tweet" } }  
{ "delete" : { "_index" : "twitter", "_type" : "tweet", "_id" : "2" } }  
{ "create" : { "_index" : "twitter", "_type" : "tweet", "_id" : "1" } }  
{ "tweet" : { "text" : "another tweet" } }
```

DARY
(A DOTAZY?)